



FIREGUARD

Air Release Valve Screwed

FGAV101



Valve Standard

Fusion bonded coating comply with AWWA C550

Working pressure


200PSI

Working Temperature

-10°C to 120°C

Connection Ends

NPT/BSPT/BSPP

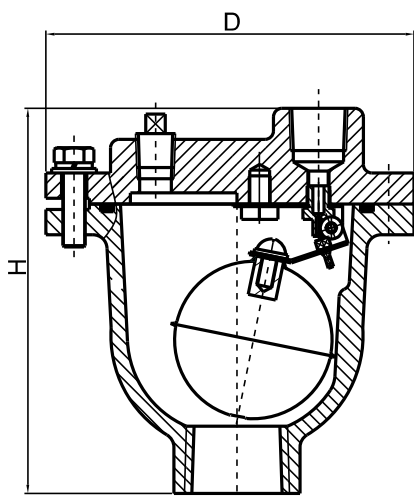

Materials List

Part	Material	ASTM Spec.
Body	Ductile Iron	A536 65-45-12
Cover	Ductile Iron	A536 65-45-12
Level	Stainless Steel	AISI 304
Seat Ring	Stainless Steel	AISI 304
Float	Stainless Steel	AISI 304
Float Arm	Stainless Steel	AISI 304
Orifice Button	Viton	Commercial

Dimensions

DN		Inlet	Outle	Orifice	D	H
mm	inch					
15	1/2	15	15	1.6	125	137
20	3/4	20	15	1.6	125	137
25	1	25	15	1.6	125	137

***Note: Subject to change without prior notice due to products optimization.

FIREGUARD GLOBAL LTD. Unit 11, Chancel Industrial Estate, Newhall Street, Willenhall, WV13 1NX, United Kingdom

www.fireguard-uk.com

valve



FIREGUARD